


Canopy will be used for coverage while customers stand in line  
\*\*RESTROOMS AVAILABLE INSIDE STORE\*\*\*\*\*

DANIA BEACH BLVD

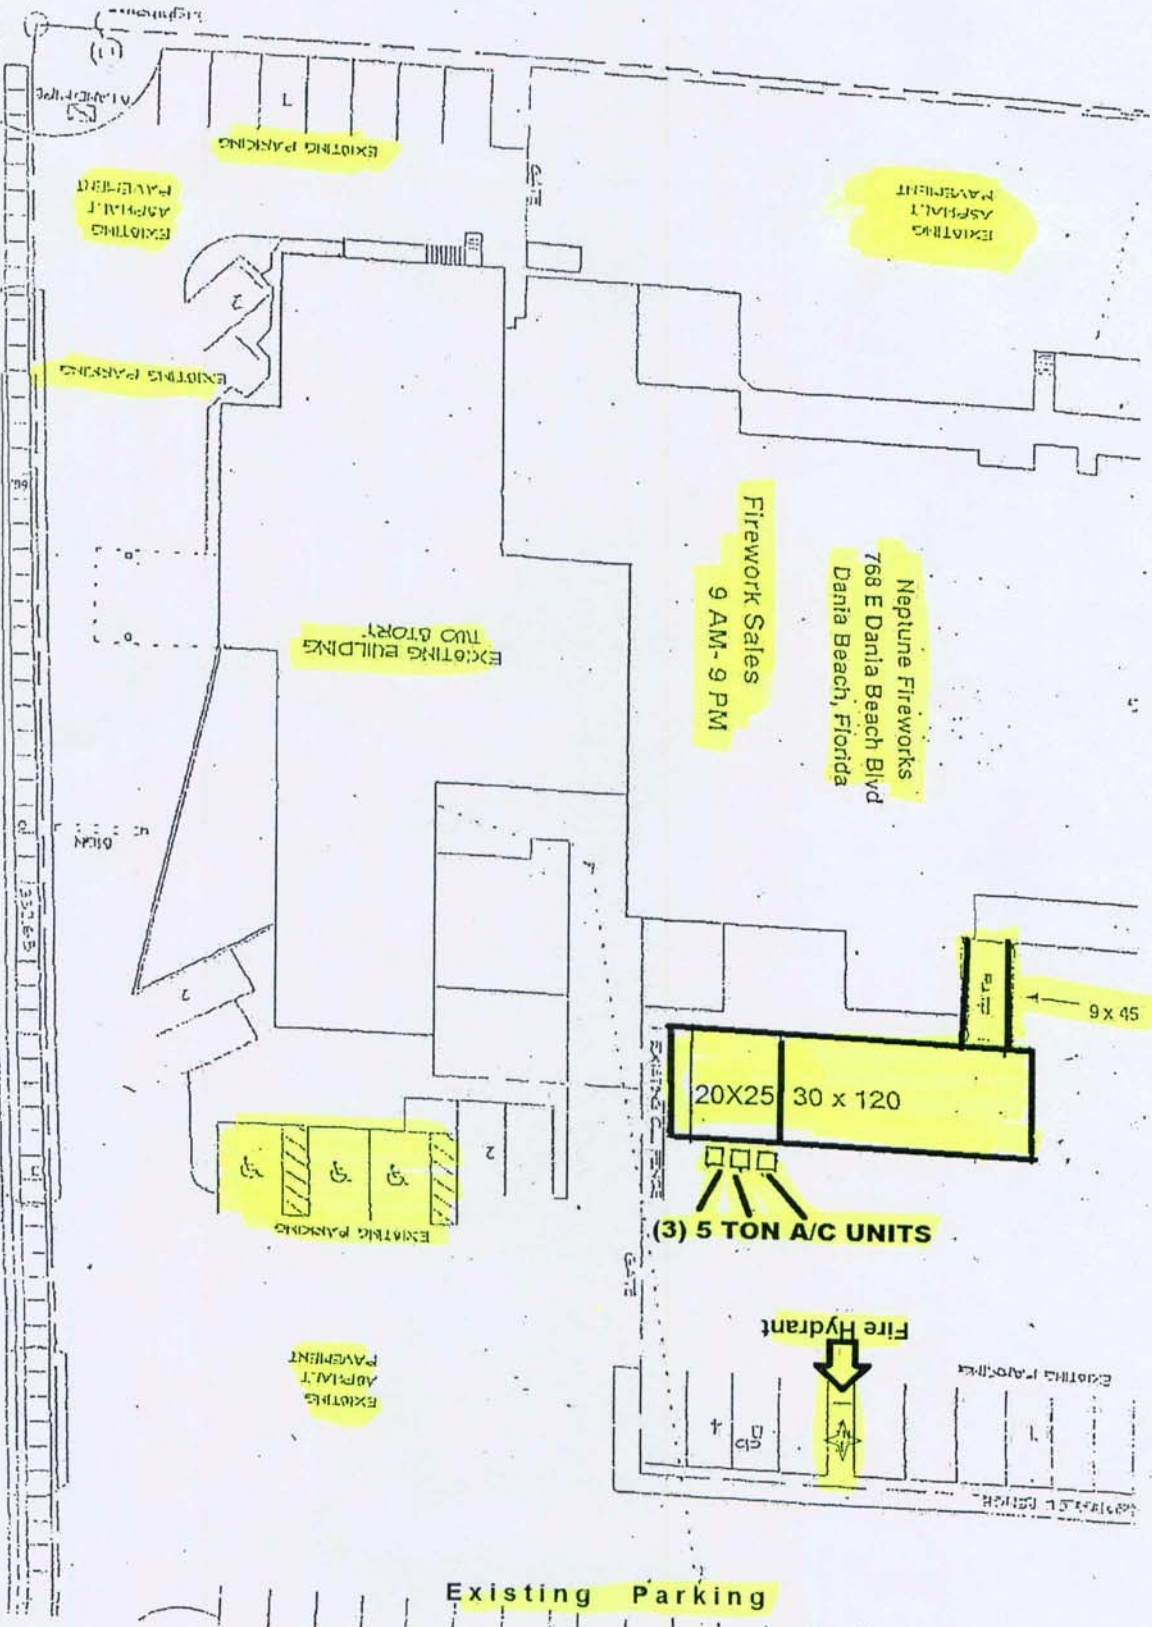

Firework Sales  
9 AM- 9 PM


Neptune Fireworks  
768 E Dania Beach Blvd  
Dania Beach, Florida

20X25 30 x 120

(3) 5 TON A/C UNITS

Fire Hydrant

Existing Parking

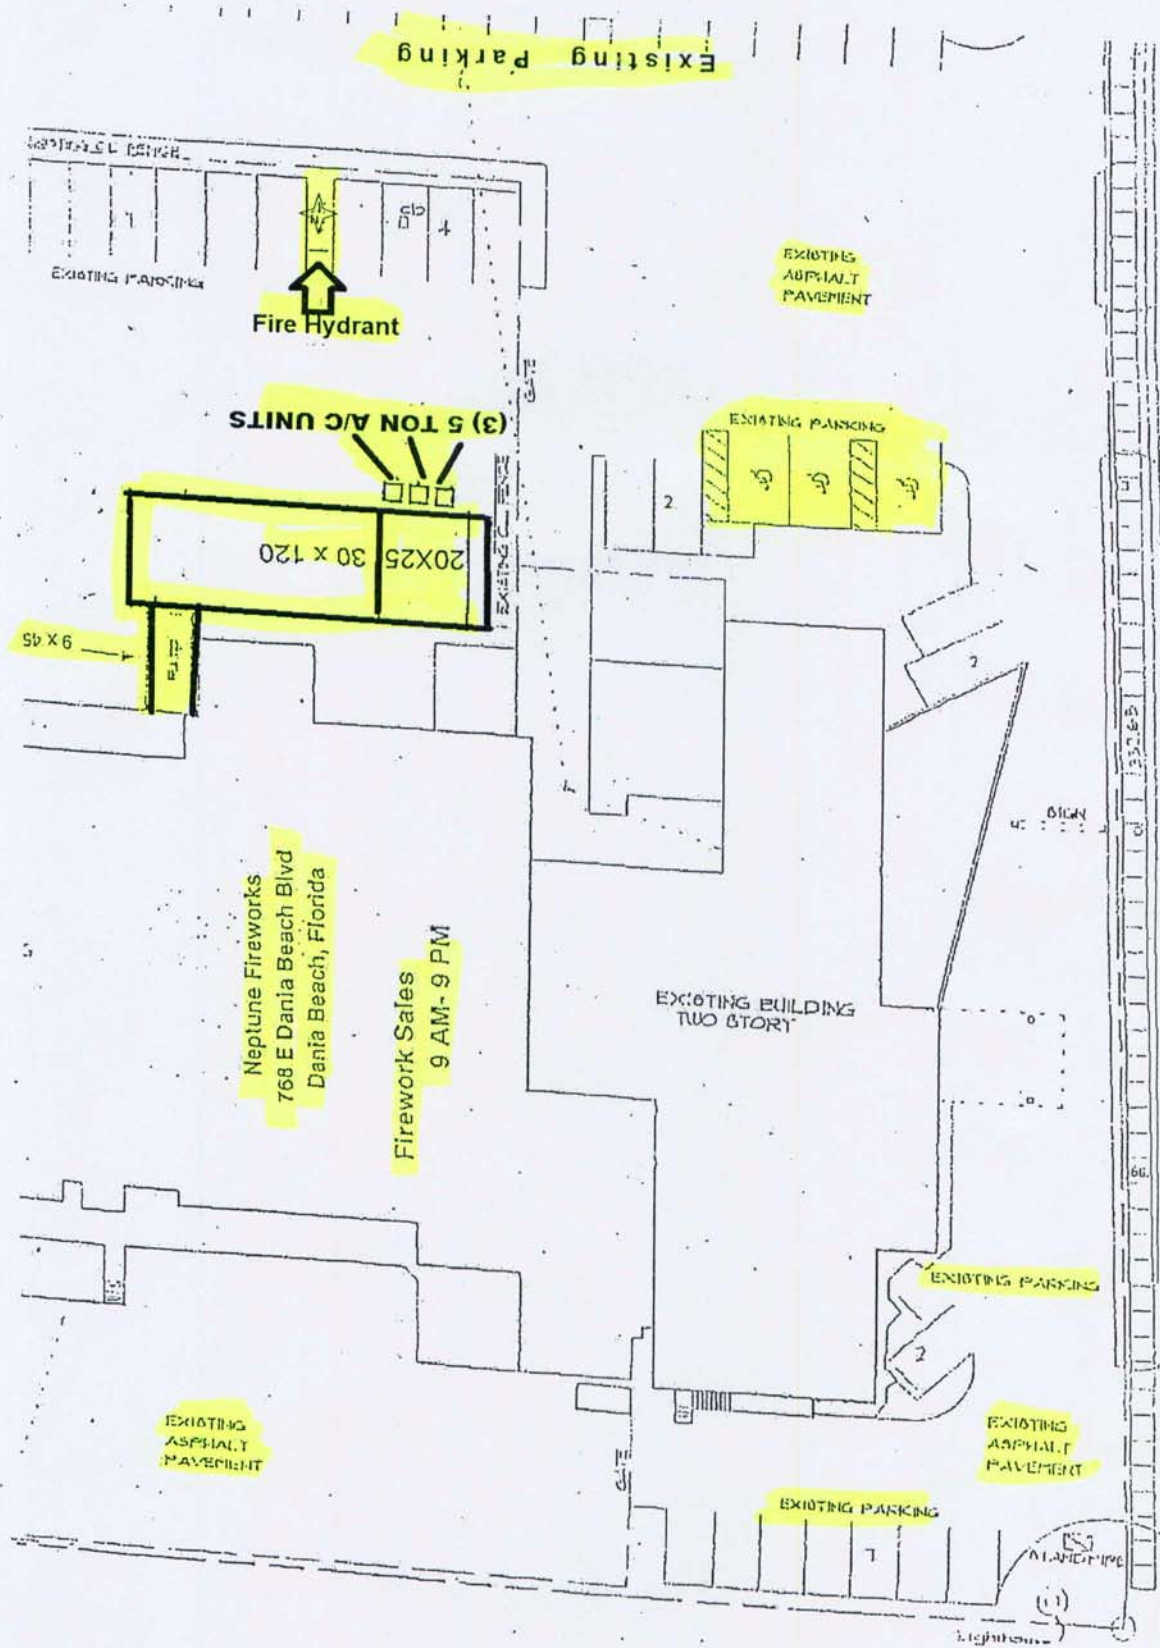




**DANIA BEACH BLVD**

Canopy will be used for coverage while customers stand in line  
 \*\*RESTROOMS AVAILABLE INSIDE STORE\*\*\*\*\*

Neptune/TNT Fireworks  
Date: 6/3/16 - 7/12/16  
Sun Coverage for Customers

Tents N Events  
1790 Mears Parkway  
Margate, FL 33063



Legend:

-  No Smoking Signs
-  Emergency Exit Signs
-  Fire Extinguisher

Electrical Plans:

Caged lights will be provided - powered by extension cords  
using on site electrical outlet / 60 Watt Light Bulb

9 x 45

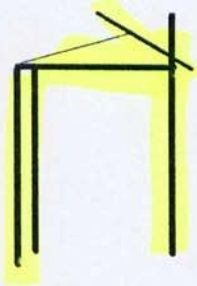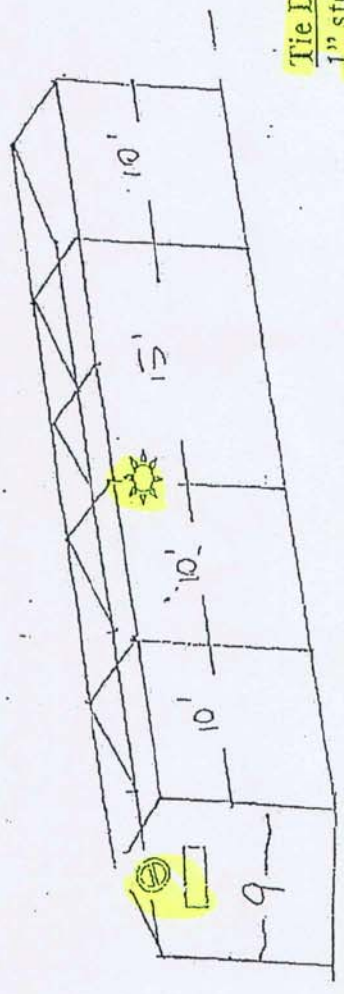

1 Spike per Leg

Tie Downs:  
1" steel spikes 40" long  
3/8" poly marine rope

Max Occupant load is not to be exceeded at any time.

Frame Work:  
All tubing is 2" aluminum (.125)  
With steel hardware ID 1.35 OD 1.73


**Legend:**

- ⊘ No Smoking
- ⊠ Emergency Lit Exit Signs
- ☆ Fire Extinguisher


Neptune/TNT Fireworks  
Date: 6/3/16 - 7/12/16  
Sun Coverage for Customers

**Electrical Plan**

- (5) Cage Lights powered by Extension Cord using on site electrical outlets/400 watt bulbs each light
- ⊠ Exit Lights powered by Extension Cord using on site electrical outlets
- (3) 5 Ton Air Conditioning Units Using Onsite Electrical Outlets
- 14' Vinyl Duct System into Tent

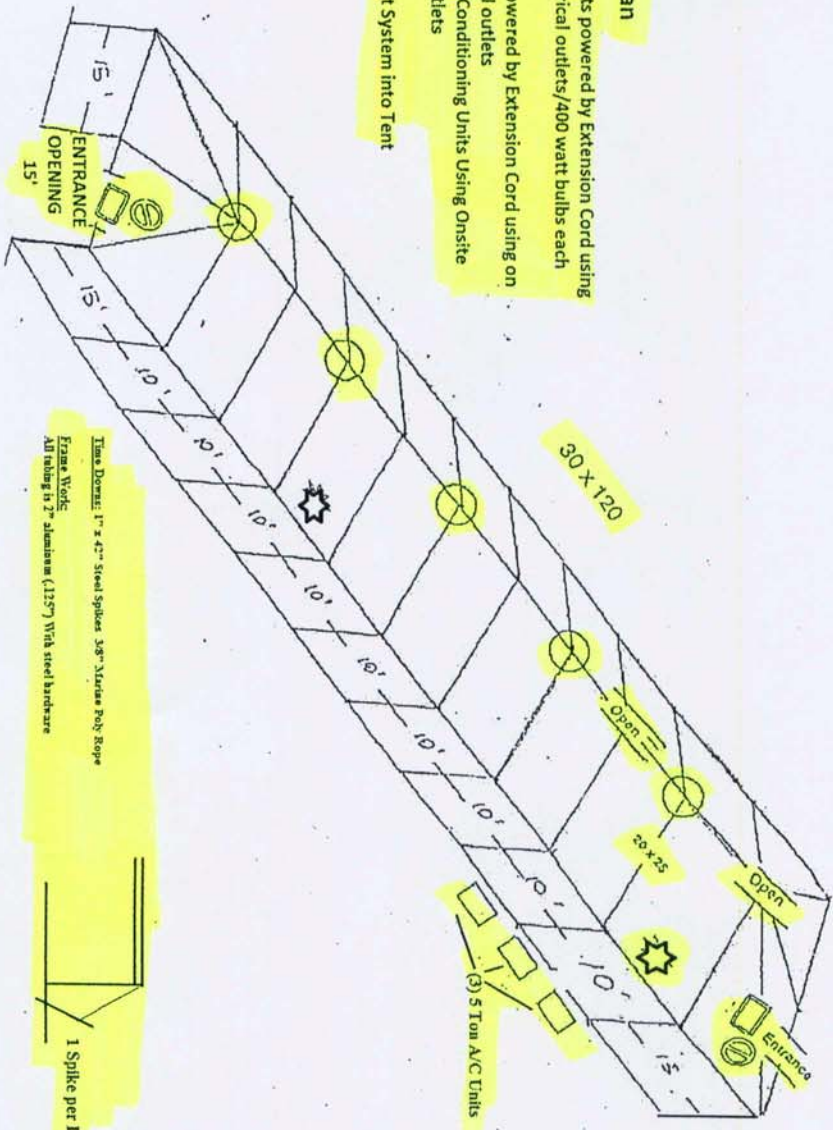

Tune Down: 1" x 4" steel Splices 3/8" Stainless Rods Rope  
Frame Work  
Attaching is 2" aluminum (1257) With steel hardware

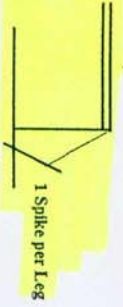

Street Side

Neptune/TNT Fireworks  
Date: 6/3/16 - 7/12/16  
Sun Coverage for Customers



20 x 25

**Electrical Plan:** ○  
(1) Hi-Lid Light powered by extension cord using on site electrical outlet / 400 watt Bulb

No Cooking

Time Downs: 1" x 42" Steel Spikes 3/8" Marine Poly Rope  
Frame Work: All tubing is 2" aluminum (.125") With steel hardware

**Legend:**  
No Smoking ○  
Fire Extinguisher ☆  
Exit/Emergency Lights ☐

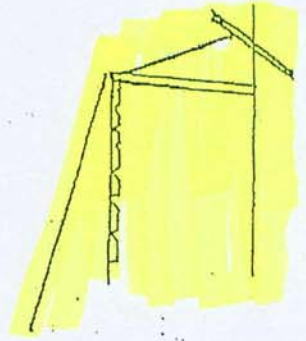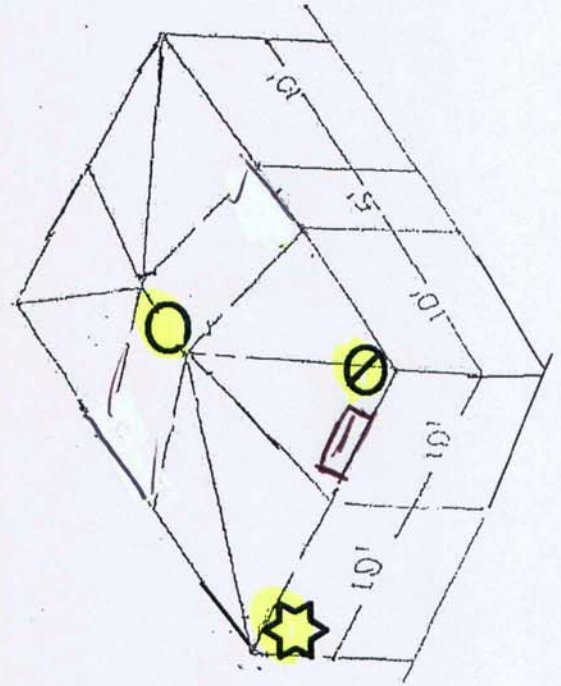


Tents N Events  
1790 Mears Parkway  
Margate, FL 33063

Neptune/TNT Fireworks  
Date: 6/3/16 - 7/12/16  
Sun Coverage for Customers

Tents N Events  
1790 Mears Parkway  
Margate, FL 33063

Legend:



No Smoking Signs



Emergency Light Exit Signs





Fire Extinguisher

**Electrical Plans:**

Caged lights will be provided - powered by extension cords  
using on site electrical outlet / 60 Watt Light Bulb

**9 x 45**

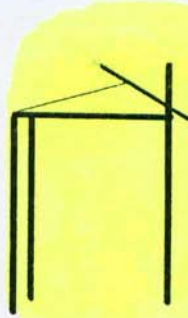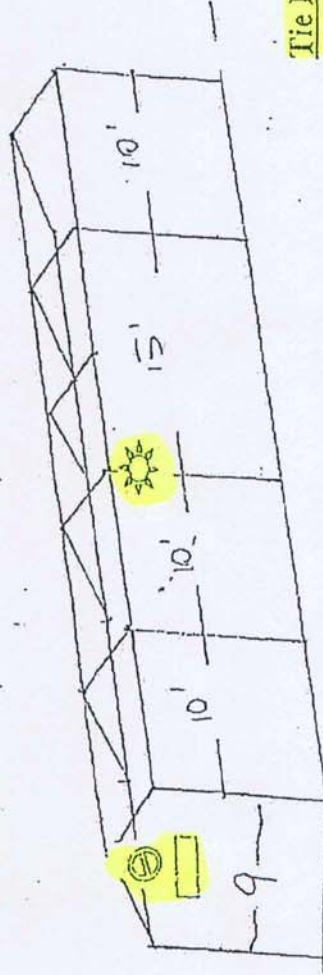

1 Spike per Leg

Tie Downs:

- 1" steel spikes 40" long
- 3/8" poly marine rope

Frame Work:


All tubing is 2" aluminum (.125)  
With steel hardware ID 1.35 OD 1.73

Max Occupant load is not to be exceeded at any time.

Neptune/TNT Fireworks  
 Date: 6/3/16 - 7/12/16  
 Sun Coverage for Customers

**Legend:**  
 No Smoking  
 Emergency Lit Exit Signs  
 Fire Extinguisher

Street Side

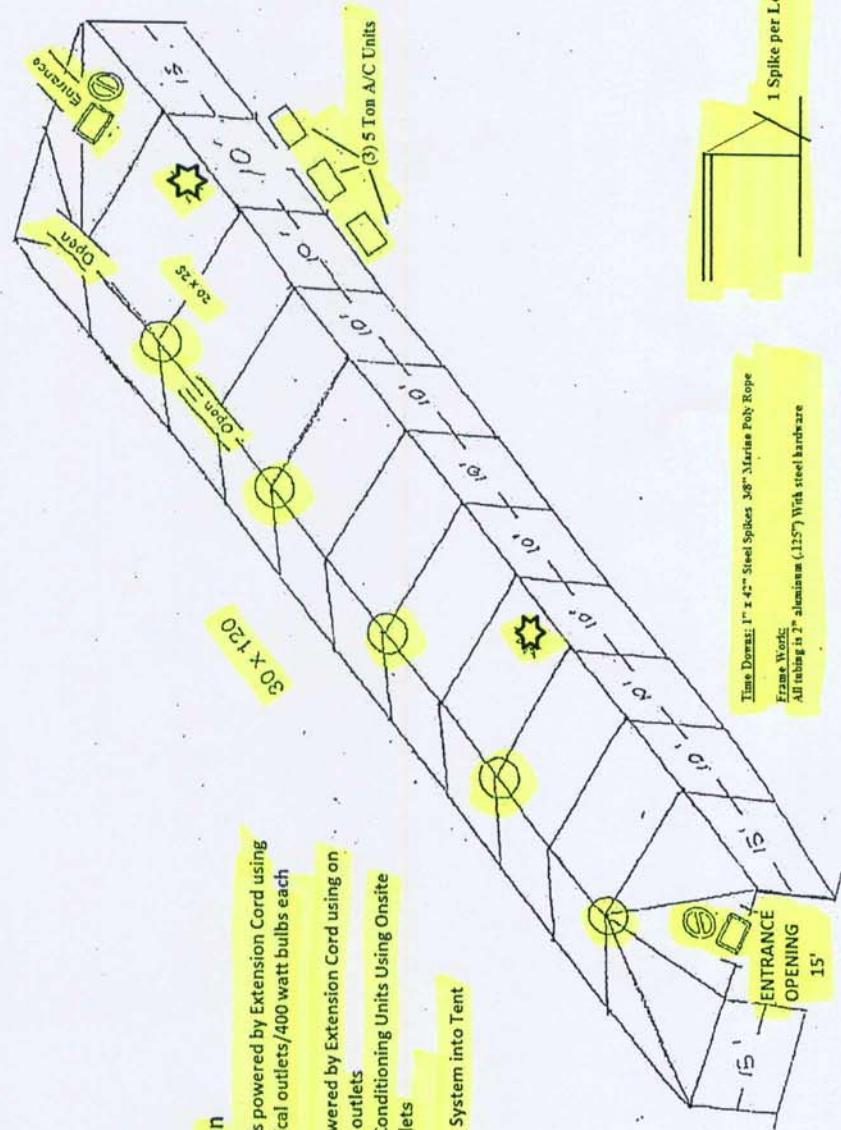

**Electrical Plan**

- (5) Cage Lights powered by Extension Cord using on site electrical outlets/400 watt bulbs each light
- Exit Lights powered by Extension Cord using on site electrical outlets
- (3) 5 Ton Air Conditioning Units Using Onsite Electrical Outlets

14' Vinyl Duct System into Tent

Tims Down: 1" x 4" Steel Spikes 3/8" Marins Pop. Rope  
 Frame Work:  
 All tubing is 2" aluminum (.115") With steel hardware

1 Spike per Leg

Neptune/TNT Fireworks  
Date: 6/3/16 - 7/12/16  
Sun Coverage for Customers

20 x 25



**Electrical Plan:** ○  
(1) Hi-Lid Light powered by extension cord using on site electrical outlet / 400 watt Bulb

No Cooking

**Time Downs:** 1" x 42" Steel Spikes 3/8" Marine Poly Rope  
**Frame Work:** All tubing is 2" aluminum (.125") With steel hardware

**Legend:**  
No Smoking ○  
Fire Extinguisher ☆  
Exit/Emergency Lights □

Tents N Events  
1790 Mears Parkway  
Margate, FL 33063

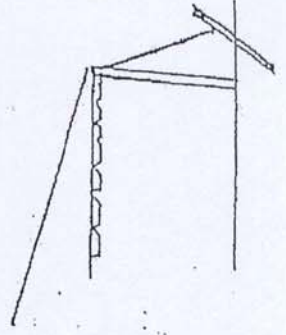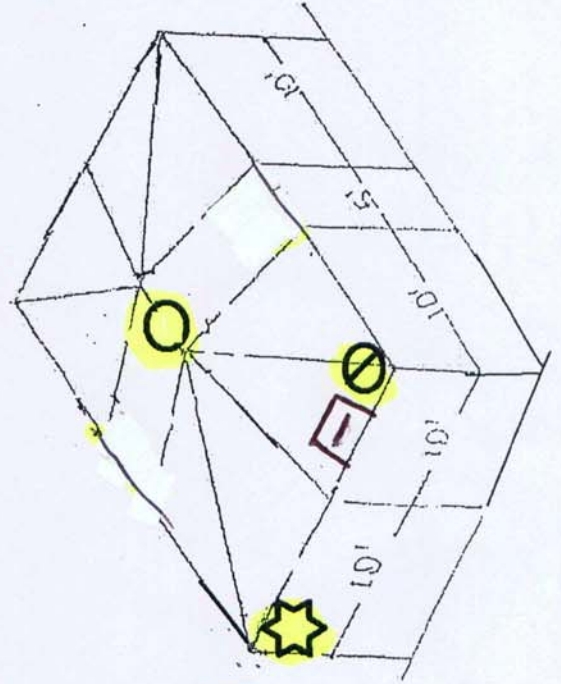




# ATTACH GUARD BEFORE USING TEMPORARY LIGHT

IN ORDER TO COMPLY WITH REQUIREMENT NO. 1088 ALL LIGHT STRINGS MUST BE USED WITH ONE OF THE GUARDS LISTED BELOW.

## STYLE #1 - METAL

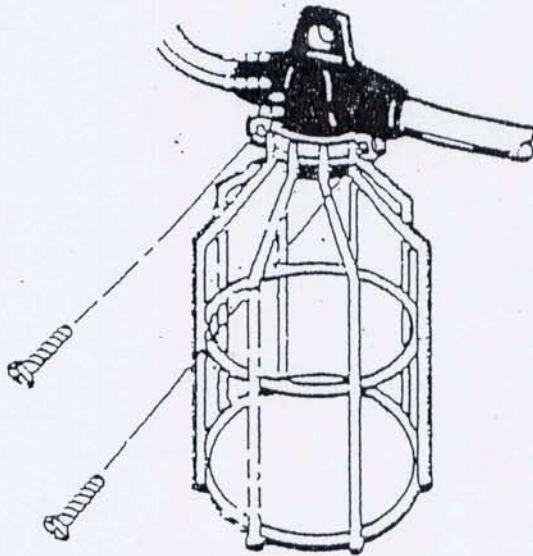


C-0397-000-BL (Vinyl coated metal guard)

TO ASSEMBLE: Push guard onto temporary light then secure with machine screws.

(2 Req'd.)  
#8-32 x 5/8  
Machine Screws

## STYLE #2 - PLASTIC

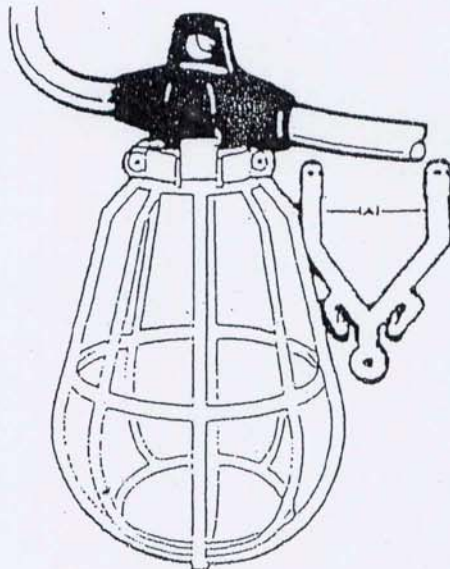

C-0348-000-YW

TO ASSEMBLE: Remove and discard plastic hanger (A) from guard. Fasten guard to temporary light then secure with tapping screws.

NOTE: Plastic Hanger (A) for use on Economy Light String  
Cat. No. A-2253-101-00 only.

(2 Req'd.)  
#8-1/2  
Tapping Screws


  
**ELECTRIC CORD**  
A LEVITON COMPANY

PACIFIC ELECTRIC CORD COMPANY  
747 W. Rossmore Beach Blvd. • P.O. Box 10 • Gardena, CA 90247  
Telephone (310) 532-6600 • (800) 226-4007 • Fax (310) 532-6044

# ATTACH GUARD BEFORE USING TEMPORARY LIGHT

IN ORDER TO COMPLY WITH REQUIREMENT NO. 1088 ALL LIGHT STRINGS MUST BE USED WITH ONE OF THE GUARDS LISTED BELOW.

## STYLE #1 - METAL

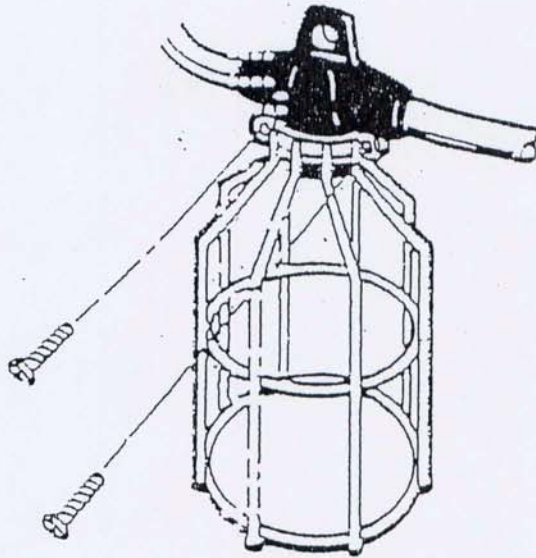


C-0397-000-BL (Vinyl coated metal guard)

TO ASSEMBLE: Push guard onto temporary light then secure with machine screws.

(2 Req'd.)  
#8-32 x 5/8  
Machine Screws

## STYLE #2 - PLASTIC

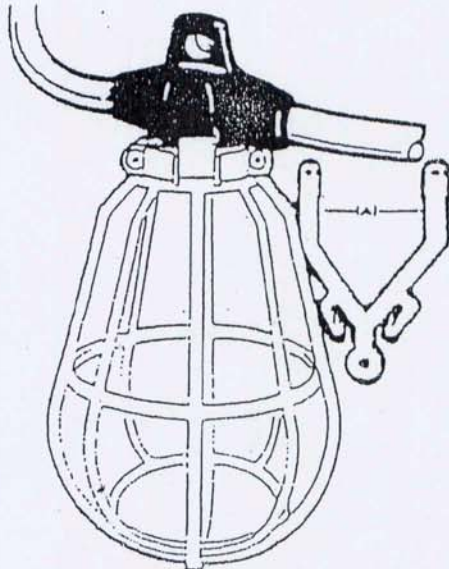

C-0348-000-YW

TO ASSEMBLE: Remove and discard plastic hanger (A) from guard. Fasten guard to temporary light then secure with tapping screws.

NOTE: Plastic Hanger (A) for use on Economy Light String  
Cat. No. A-2253-101-00 only.


(2 Req'd.)  
#8-1/2  
Tapping Screws

  
**ELECTRICORD**  
A LEVITON COMPANY

PACIFIC ELECTRICORD COMPANY  
247 W. Redwood Beach Blvd. • P.O. Box 10 • Gardena, CA 90247  
Telephone (310) 532-5600 • (800) 226-4047 • Fax (310) 532-5044

# 16" Aluminum (400 Watt High Bay Light, Pulse Start Metal Halide, 120-277v)

- Lamp:400W PSMH
- Input Watts:458
- Voltage:120-277V
- Base:Mogul Open Rated
- ANSI:M155/O
- Start Up Time:3-5 mins
- Lumen Output:41,000
- Lamp Life:20,000
- Width:16"
- Height:24.5"

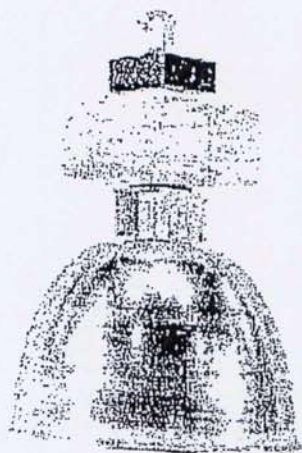


## Specifications

- Sturdy die-cast aluminum housing
- Adjustable lamp position
- Rugged 4kv porcelain open rated socket
- Wiring compartment with adjustable leveling feature
- 16-inch spun aluminum reflector
- Mount using threaded 3/4-in conduit or with hook & cord accessory kit
- Maximum ambient temperature of 35 degrees C
- UL Listed in U.S. for damp locations

# 16" Aluminum (400 Watt High Bay Light, Pulse Start Metal Halide, 120-277v)

- Lamp:400W PSMH
- Input Watts:458
- Voltage:120-277V
- Base:Mogul Open Rated
- ANSI:M155/O
- Start Up Time:3-5 mins
- Lumen Output:41,000
- Lamp Life:20,000
- Width:16"
- Height:24.5"

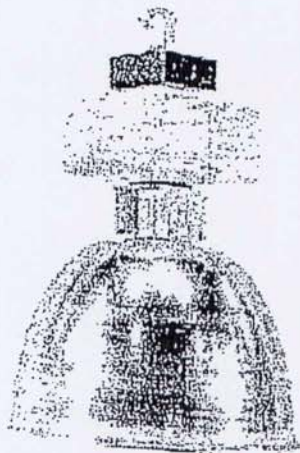

## Specifications

- Sturdy die-cast aluminum housing
- Adjustable lamp position
- Rugged 4kv porcelain open rated socket
- Wiring compartment with adjustable leveling feature
- 16-inch spun aluminum reflector
- Mount using threaded 3/4-in conduit or with hook & cord accessory kit
- Maximum ambient temperature of 35 degrees C
- UL Listed in U.S. for damp locations